

16 apr




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04N 7/24		A1	(11) International Publication Number: WO 99/52292
			(43) International Publication Date: 14 October 1999 (14.10.99)
(21) International Application Number: PCT/US99/07154 (22) International Filing Date: 31 March 1999 (31.03.99) (30) Priority Data: 09/054,933 3 April 1998 (03.04.98) US (71) Applicant: AVID TECHNOLOGY, INC. [US/US]; Metropolitan Technology Park, One Park West, Tewksbury, MA 01876 (US). (72) Inventor: FRINK, Craig, R.; 53 Moore Street, Chelmsford, MA 01824 (US). (74) Agent: GORDON, Peter, J.; Wolf, Greenfield & Sacks, P.C., 600 Atlantic Avenue, Boston, MA 02210 (US).		(81) Designated States: AU, CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>	

(54) Title: METHOD AND APPARATUS FOR ACCESSING VIDEO DATA IN MEMORY ACROSS FLOW-CONTROLLED INTERCONNECTS

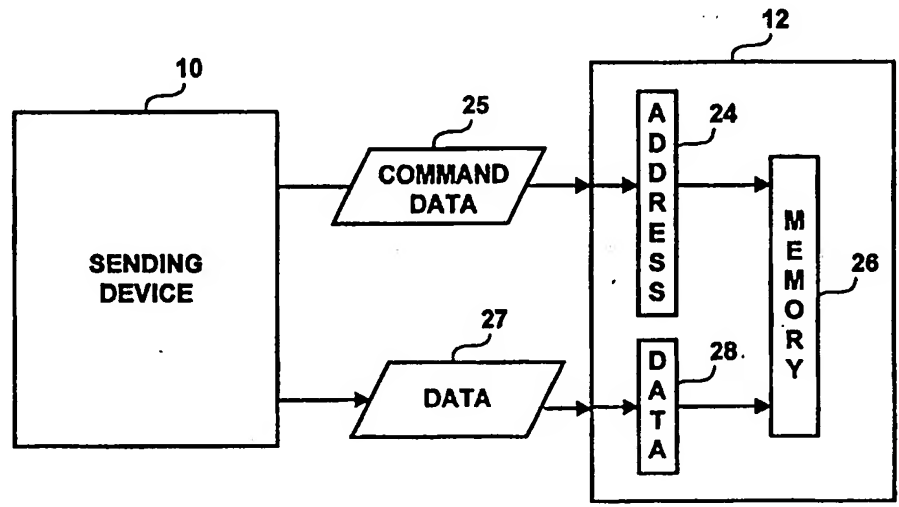

(57) Abstract

Command data may be embedded in the data transmitted over an interconnect between video devices to specify memory addresses in a destination device. Using an embedded address allows address-dependent data to be transmitted over the interconnect without losing these attributes. For example, compressed video may be transferred from a disk controller to a memory device using this interconnection protocol without losing address attributes of the bus architecture. The address information may be used either to read data from or to write data to a device over the interconnect into randomly-accessible memory locations.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

METHOD AND APPARATUS FOR ACCESSING VIDEO DATA IN MEMORY ACROSS FLOW-CONTROLLED INTERCONNECTS

FIELD OF THE INVENTION

5 The present invention is related to protocols for interconnecting data processing devices, particularly video processing devices.

BACKGROUND

10 Analog motion video signals, such as those used in common television sets, video tape recorders and other analog video systems, are temporally continuous and synchronous signals requiring various elements in a video system to be synchronized in order to be used. In other words, analog motion video signals have a predetermined and fixed rate to which all of the elements in the video system are synchronized. Any element in the video system is designed with the assumption that there will be a constant rate for input and output of motion
15 video information.

20 More recently, it has been possible to store digital motion video data in data files on a computer. There are several methods for playing back such motion video data. One method is called "pushing" or "streaming" of the motion video data. Streaming is based on an assumption that a system can provide an average data flow rate that is the same as the ultimate data flow rate needed to ensure temporally continuous output of analog motion video images to a viewer. Sufficient buffering is used to account for expected latencies in data transfer between elements. In some cases, both the temporal and spatial resolution of the motion video information may need to be reduced. Such systems typically are designed with the assumption that transfer of audio and video data from a source through several processing
25 elements to its ultimate destination can neither be delayed nor stopped.

30 When a general purpose digital computer is used to process motion video information, a constant rate of flow of data generally cannot be maintained. There may be variations in data flow rates due to various latencies in the computer system due to, for example, disk or memory read latency, interrupts from other processing elements in the computer, etc. In addition, in some systems, such as editing systems, the ability to stop and restart playback is desirable. In order to overcome such problems, one method which has been used is to provide sufficient buffering in combination with an ability for data transfer to be stalled, such as shown in U.S. Patent No. 5,045,940 (Peters, et al.) which is hereby

incorporated by reference. These principles are used in a computer network as described in published European Patent Application No. 0674414A2. An extension of this combination to special effects processing is disclosed in PCT Publications WO94/24815 and WO95/26100 which are incorporated by reference. In this system, a data decompressor outputs data into a first buffer, from which it is transferred to a second buffer associated with a special effects processor. The first buffer indicates whether valid data is available. In addition, the special effects processor indicates to a controller associated with the decompressor whether it can receive data based on memory in the second buffer.

One drawback of these systems is that they use a significant amount of buffering to accommodate for delays in data transfer between elements. Such systems also are designed for use with a single predetermined format of media. Video processing devices also generally are interconnected in a manner such that a receiver of data presumes that the sender of video data is transmitting video data over the interconnect in a predetermined order. Video data also is presumed to be written into a memory of a receiving device by one sender in a sequential manner.

SUMMARY

Command data may be embedded in the data transmitted over an interconnect between video devices to specify memory addresses in a destination device. Using an embedded address allows address-dependent video data to be transmitted over the interconnect without losing these attributes. For example, compressed video may be transferred from a disk controller to a memory device using this interconnection protocol without losing address attributes of the bus architecture. The address information may be used either to read video data from or to write video data to a device over the interconnect into randomly-accessible memory locations.

Accordingly, in one aspect, an output interface for a sender of video data has an output for providing video data, and a valid data signal associated with the data indicating whether the associated data includes valid video data, and a valid command signal indicating whether the data includes command data. The command data includes a memory address at a receiver of the data. The output interface transfers data and asserts one of the valid data signal and the valid command signal to the receiver in response to a request signal received from the receiver.

In another aspect, an input interface for a receiver of video data has an input for receiving data, and a valid data signal associated with the data indicating whether the associated data includes valid video data, and a valid command signal indicating whether the data includes command data. The command data includes a memory address at the receiver.

5 The input interface transfers video data received to the memory address specified in the command data in the memory of the receiver.

In another aspect, a device for receiving video data from another device includes a memory for storing the video data. An input interface having an input for receiving data, and a valid data signal indicating whether the data includes valid video data, and a valid command

10 signal indicating whether the data includes command data. The command data includes a memory address in the device. The input interface stores video data received from the other device in the memory in the device at the memory address specified in the command data. An output interface has an output for providing a request signal. The other device transfers the video data to the device in response to the request signal.

15 In another aspect, a device for writing video data to a memory in another device has an output interface having an output for providing data, and a valid data signal associated with the data indicating whether the associated data is valid video data, and a valid command signal indicating whether the data includes command data. The command data includes a memory address in the memory in the other device, and has an input for receiving a request

20 signal from the other device. The output interface transfers data to the other device in response to a request signal received from the other device.

In another aspect, a device for reading video data from a memory in another device includes an output interface having an output for providing data, and a valid data signal associated with the data indicating whether the associated data is valid video data, and a valid

25 command signal indicating whether the data includes command data. The command data includes a memory address in the memory in the other device and has an input for receiving a request signal from the other device. The output interface transfers data to the other device in response to a request signal received from the other device. An input interface has an input for receiving data and a valid data signal associated with the data indicating whether the

30 associated data is valid video data. In one embodiment, the device has a memory. The input of the input interface receives a valid command signal indicating whether the data includes command data. The command data includes a memory address in the memory of the device.

- 4 -

The input interface transfers valid data received to the memory address specified in the command data in the memory of the device. In another embodiment, called queue-coupled memory access, the device has a queue of memory addresses sent in command data to the other device. The input of the input interface receives a valid command signal indicating whether the data includes command data. The command data includes a memory address in the memory of the other device. The input interface determines whether the memory address corresponds to a memory address in the queue.

In another aspect, a device for providing video data to another device has a memory for storing video data. An input interface has an input for receiving data, and a valid command signal indicating whether the data includes command data. The command data includes a memory address in the device. The input interface reads video data from the memory in the device using the memory address specified in the command data. An output interface has an output for providing data, and a valid data signal associated with the data indicating whether the associated data is valid video data. The output interface transfers the video data read from the memory to the other device in response to a request signal received from the other device. In one embodiment, the input of the input interface receives a valid data signal indicating whether the data includes valid video data. The input interface transfers valid data received to the memory address specified in the command data in the memory of the device. In another embodiment, the device includes a queue of memory addresses received in command data from the other device. The output of the output interface sends a valid command signal indicating whether the data includes command data. The command data includes a memory address in the memory of the device, wherein the input interface outputs a memory address from where the data was read.

It should be understood that other aspects of the invention include the processes performed by these interfaces and devices in order to control data flow between devices while permitting access to memory using addressed embedded in data transported over flow-controlled interconnects.

BRIEF DESCRIPTION OF THE DRAWING

In the drawing,
Fig. 1 is a block diagram of an interconnect between two video devices;

Fig. 2 is a block diagram illustrating writing of data to a receiving device wherein command data included in the information specifies a destination address in the memory of the receiving device;

Fig. 3 is a block diagram illustrating reading of data from a remote memory device, wherein command data included in a request includes an address in the remote memory device;

Fig. 4 is a block diagram illustrating the use of command data providing an address offset;

Fig. 5 is a block diagram illustrating the use of command data defining target address windows in a sending device address space; and

Fig. 6 is a block diagram illustrating an embodiment of a device with queue coupled direct memory access.

DETAILED DESCRIPTION

An interconnect for connecting two data processing devices is shown in Fig. 1. The diagram in Fig. 1 is general and illustrates the kind of data that is transferred between a sending device 10 and receiving device 12 over an interconnect 14. The kind of information includes data 16, a valid data signal (DVAL) 18, an optional valid command signal (CVAL) 20 and a request signal (REQ) 22. The sending device also may transmit a reference clock (REF_CLK) 17 to the receiving device. The data may be data to be processed or command data and also may include a boundary signal which is a delimiter of the data being transferred, such as the end of an image for video data. Various implementations for the interconnect 14 and a protocol for controlling data flow over the interconnect are described in the following U.S. Patent Application No. 08/879,981, entitled "Apparatus and Method for Controlling Transfer of Data Between and Processing of Data by Interconnected Data Processing Elements, filed June 20, 1997 by Jeffrey D. Kurtze et al., and in U.S. Patent Applications entitled "Apparatus and Method for Controlling Transfer of Data Between and Processing of Data by Interconnected Data Processing Elements," filed April 3, 1998, by Craig R. Frink et al., and "A Packet Protocol for Encoding and Decoding Video Data and Data Flow Signals and Devices for Implementing the Packet Protocol," filed April 3, 1998 by Craig R. Frink, et al., and entitled "Method and

Apparatus for Controlling Data Flow Between Devices Connected by a Memory," filed April 3, 1998 by Craig R. Frink, which are hereby incorporated by reference.

Using such an interconnect, data transmitted over the interconnect may include command data such as an address in the receiving device 12. The embedded address allows address-dependent data processing to be performed. For example, data, such as video data, may be transferred from storage, e.g., via a disk controller, to a destination device, such as a video processing board, over a PCI bus and through an interconnect shown in Fig. 1 without losing PCI attributes such as the address in the destination device and the length of the data. Because a sender may specify an address, data may be written into the memory at the receiving device 12 in any order.

Referring now to Fig. 2, the writing of data by the sending device 10 into memory of the receiving device 12 will now be described. The sending device 10 transmits data 27 and command data 25 to the receiver 12. The command data 25 may precede the data 27 when the command data is transmitted separately or serially with the data to which it corresponds. Alternatively, the command data 25 may be included in a data packet including the data 27 to be stored at the receiving device 12. Command data 25 also may be transmitted from the sending device 10 to the receiving device 12 through a channel or interconnect separate from the channel or interconnect through which the data 27 is transmitted. Command data may be distinguished from video data using the valid data signal and the valid command signal. The command data 25 is processed by the receiver 12 to determine an address which, as indicated at 24, is applied to the address inputs of the memory 26. The data 27 is written into the memory 26 at the address 24 specified by command data. If the memory 26 has sufficient capacity, different channels may be defined by allocating a segment of the memory for each channel. Alternatively, several channels may write to the same memory 26 to enable data to be combined in the memory.

A memory controller may have a base address to which the address in the command data is added as an offset. Referring now to Fig. 3, such an embodiment will now be described. A base address may be specified in many ways. For example, the command data may include a stream identifier which may be used as an index to a base memory address. Such a stream identifier may be provided in a packet conforming with a packet-based protocol, such as described in U.S. Patent Application entitled "A Packet Protocol for Encoding and Decoding Video Data and Data Flow Signals and Devices for Implementing the

Packet Protocol,” filed April 3, 1998 by Craig R. Frink and Andrew V. Hoar, which is hereby incorporated by reference. The identifier may be used to index a table of base addresses. In Fig. 3, the command data 22 includes a base address identifier as indicated at 30 and an offset indicated at 32. The base address identifier 30 is applied to an address table 34 which outputs
5 a base address. The base address and the offset 32 are combined in an adder 36 to provide the data address 38 which is used to access the memory 26. This embodiment allows a single memory controller to transfer data packets received for different streams based on a stream identifier in the data.

In the foregoing embodiments, the sending device 10 may be a PCI device which
10 uses a direct memory access (DMA) to transfer data over a PCI bus and through the interconnect 14 to a receiving device 12. In such an embodiment, the PCI attributes of the data, such as the address and length may be provided through the interconnect 14 to the device.

In another embodiment, rather than using direct memory access at a sending device,
15 the data is written into a target address window in the sending device. Fig. 4 illustrates a sending device 50 with target address windows 52. A target address window associates an address range in the sender with an address range in the PCI address space and a stream identifier. The target address windows may support individual target address maps or may be combined to create a larger target address for a single sending device. The total address space
20 of the target address windows may be programmable in size and divided among the windows. The number of windows is function of the number of target devices (receivers) and streams supported. In this embodiment, data written into a target address window is transferred from the target address window to the receiving device through the switch, with an address
25 specified in the command data. In Fig. 4 data is transferred by the sender 50 to a receiving device 58 over a switch 54. A device initiating a transaction selects a receiver by address range, which selects a window in the sending device 50.

The target initiated data transaction is sent over the switch in the same way as a DMA initiated transaction and is received by a DMA engine 56 at the receiving device 58. The DMA engine 56 may use the embedded address in the data received over the switch, or
30 may use a value programmed by the receiver to move the data packet to memory. The address sent from the sending device to the receiving device may be a direct address or an indirect address, i.e., an address offset, such as shown in Figs. 2 and 3.

It is also possible to read data from a remote memory device using this protocol, as now will be described in connection with Fig. 5. An address for accessing a memory in a device is transmitted over a data link to the device as command data. The device receives the command data and reads data from the memory at the address specified in the command data.

5 The command data 88 is transferred over the data link to the sender 80. Sender 80 has a sending interface 82 through which data is sent to a receiver interface 84 in and receiver 86. This interconnect may be an interconnect such as shown in Fig. 1. This figure shows the command data 88 being transferred from the sender 80 to a receiver 86. The receiver interface 84 receives the command data and applies it to the address inputs of memory 90, which

10 provides data to a sending interface 92 at the receiver 86. The sending interface returns data 94 to a receiving interface 96 in the sender 80. The interconnect for transporting data 94 may be an interconnect such as shown in Fig. 1.

Referring now to Fig. 6, a queue coupled direct memory access device will now be described. In this embodiment, the sender has a DMA engine 60 with a DMA address queue

15 62. The queue tracks transactions that are issued to a remote memory, such as performed in the system of Fig. 5. The receiver may have a memory control address queue 64 which also receives addresses and stores them in a pipeline fashion. In response to a received address, as indicated at 65, the memory 66 is accessed to read data 68. The address 70 also is returned to the sender 60. The returned address 70 is compared to addresses the address queue 62 and the

20 corresponding entry in the queue 62 is removed.

The queue coupled direct memory access is used when applications using the system use the data to indicate control transfer points. For example, an application may scan a video data stream for a marker code, such as may be found in JPEG-compressed or MPEG-compressed video data. When a marker code is found, a change in flow or DMA context may

25 occur. When changes in flow occur, the DMA engine 60 tracks the address at the time the flow changes and may return to the original context.

In particular, the queue 62 includes a sequential list of transactions that the DMA 60 has sent to the memory, a current transaction pointer, and a pre-fetch pointer. The current transaction pointer indicates the address of the transaction that is currently in use and for

30 which data is being received from memory. The pre-fetch pointer indicates the last pipeline transaction issued to memory 66. The transaction queue depth is a function of interconnect

and memory latency. By queuing a number of transactions corresponding to the memory latency, the performance capable of being achieved by the pipeline is maximized.

The queue 62 advances its current transaction pointer when a new transaction returns from memory. This advancement allows the DMA to keep precise positional information regarding transactions while taking advantage of the fact that DMA transactions are pipelined. As an example, if the DMA engine is scanning for a marker code, it can stop at any component in the stream and then restart at the next component sometime later. Because the DMA knows its current transaction pointer, it is able to restart at this point. If the DMA context changes because of a data dependency, like a marker code in the data stream, pre-fetched transactions are flushed from the pipeline before new DMA context is used. This flushing operation may involve waiting until pre-fetched transactions return from memory, flushing the data FIFO, or, in systems with large memory transaction queues, sending a command packet to the memory to terminate an unfinished transaction for the device.

By using a queue of pipelined DMA addresses, contextual coherence may be maintained when multiple DMA transactions issue before data returns from memory and the returning data results in changes to the DMA context. The DMA with such a queue may issue memory transactions limited only to the depth of the memory pipeline and the depth of the address queue. Transactions may be issued in any sequence directed by the DMA context. The memory system tags the data for return with a value that is compared with the DMA address queue. The DMA compares the returning tag address with its queue of pre-fetched address pointers. When a data-dependency is detected in the data stream, the DMA stops processing at the current address and stores its context for future processing. Previously issued pipeline transactions following this context switch point may be discarded or retained for use when the DMA resumes processing of the context.

Using such a circuit, multiple independent data streams may be combined together into a single stream, or a data stream may be separated into multiple independent data streams. Such an embodiment described in more detail in U.S. Patent Application entitled "Video Data Storage and Transmission Formats and Apparatus and Methods for Processing Video Data in Such Formats," filed April 3, 1998, by Craig R. Frink et al., which is hereby incorporated by reference.

Allowing a memory address to be conveyed along with video data enables the use of a memory that is remote from all devices to accumulate the video data in parallel rather than

in series. The ability to convey a memory destination address over a video interconnect enables nonlinear data, such as command data, or data from a storage element or network to be commercial between various devices efficiently. Memory transactions may be pipelined using a queue to track addresses to which requests have been sent and for which data arrival is
5 awaited. These benefits are provided in combination with the capability of transferring data with controlled flow or constant flow over the interconnect.

Having now described a few embodiments, it should be apparent to those skilled in the art that the foregoing is merely illustrative and not limiting, having been presented by way of example only. Numerous modifications and other embodiments are within the scope of one
10 of ordinary skill in the art and are contemplated as falling within the scope of the invention.

CLAIMS

1. An output interface for a sender of video data having an output for providing video data, and a valid data signal associated with the data indicating whether the associated data includes valid video data, and a valid command signal indicating whether the data includes command data, and wherein the command data includes a memory address at a receiver of the data, wherein the output interface transfers data and asserts one of the valid data signal and the valid command signal to the receiver in response to a request signal received from the receiver.
2. An input interface for a receiver of video data having an input for receiving data, and a valid data signal associated with the data indicating whether the associated data includes valid video data, and a valid command signal indicating whether the data includes command data, wherein the command data includes a memory address at the receiver, wherein the input interface transfers video data received to the memory address specified in the command data in the memory of the receiver.
3. A device for reading video data from a memory in another device, comprising:
 - an output interface having an output for providing data, and a valid data signal associated with the data indicating whether the associated data is valid video data, and a valid command signal indicating whether the data includes command data, and wherein the command data includes a memory address in the memory in the other device, and having an input for receiving a request signal from the other device;
 - wherein the output interface transfers data to the other device in response to a request signal received from the other device; and
 - an input interface having an input for receiving data, and a valid data signal associated with the data indicating whether the associated data is valid video data.
4. The device of claim 3, further comprising:
 - a memory; and
 - wherein the input of the input interface further receives a valid command signal indicating whether the data includes command data, wherein the command data includes a

memory address in the memory of the device, wherein the input interface transfers valid data received to the memory address specified in the command data in the memory of the device.

5. The device of claim 3, further comprising:

5 a queue of memory addresses sent in command data to the other device; and
wherein the input of the input interface further receives a valid command signal indicating whether the data includes command data, wherein the command data includes a memory address in the memory of the other device, wherein the input interface determines whether the memory address corresponds to a memory address in the queue.

10 6. A device for providing video data to another device, comprising:

a memory for storing video data;
an input interface having an input for receiving data, and a valid command signal indicating whether the data includes command data, wherein the command data includes a
15 memory address in the device, wherein the input interface reads video data from the memory in the device using the memory address specified in the command data;
an output interface having an output for providing data, and a valid data signal associated with the data indicating whether the associated data is valid video data;
wherein the output interface transfers the video data read from the memory to the
20 other device in response to a request signal received from the other device.



7. The device of claim 6, wherein the input of the input interface further receives a valid data signal indicating whether the data includes valid video data, wherein the input interface transfers valid data received to the memory address specified in the command data in
25 the memory of the device.

8. The device of claim 7, further comprising:

a queue of memory addresses received in command data from the other device; and
wherein the output of the output interface further sends a valid command signal
30 indicating whether the data includes command data, wherein the command data includes a memory address in the memory of the device, wherein the input interface outputs a memory address from where the data was read.

9. A device for receiving video data from another device, comprising:
a memory for storing the video data;
an input interface having an input for receiving data, and a valid data signal
5 indicating whether the data includes valid video data, and a valid command signal indicating
whether the data includes command data, wherein the command data includes a memory
address in the device, wherein the input interface stores video data received from the other
device in the memory in the device at the memory address specified in the command data;
an output interface having an output for providing a request signal, wherein the other
10 device transfers the video data to the device in response to the request signal.
10. A device for writing video data to a memory in another device, comprising:
an output interface having an output for providing data, and a valid data signal
associated with the data indicating whether the associated data is valid video data, and a valid
15 command signal indicating whether the data includes command data, and wherein the
command data includes a memory address in the memory in the other device, and having an
input for receiving a request signal from the other device;
wherein the output interface transfers data to the other device in response to a
request signal received from the other device.

1/4

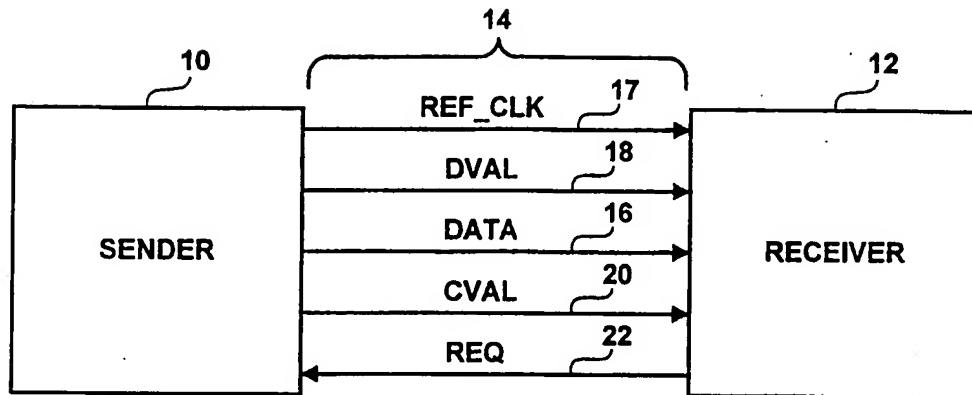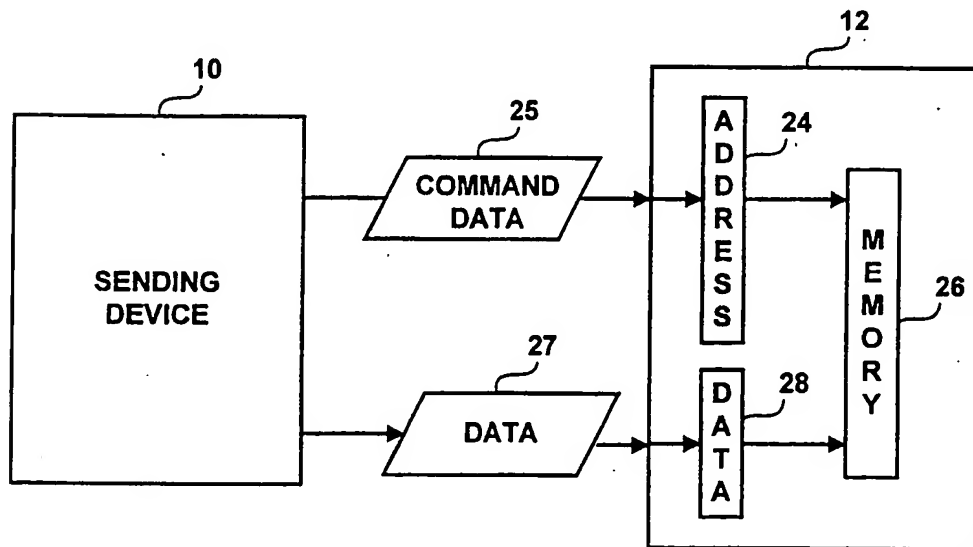**FIG. 1****FIG. 2**

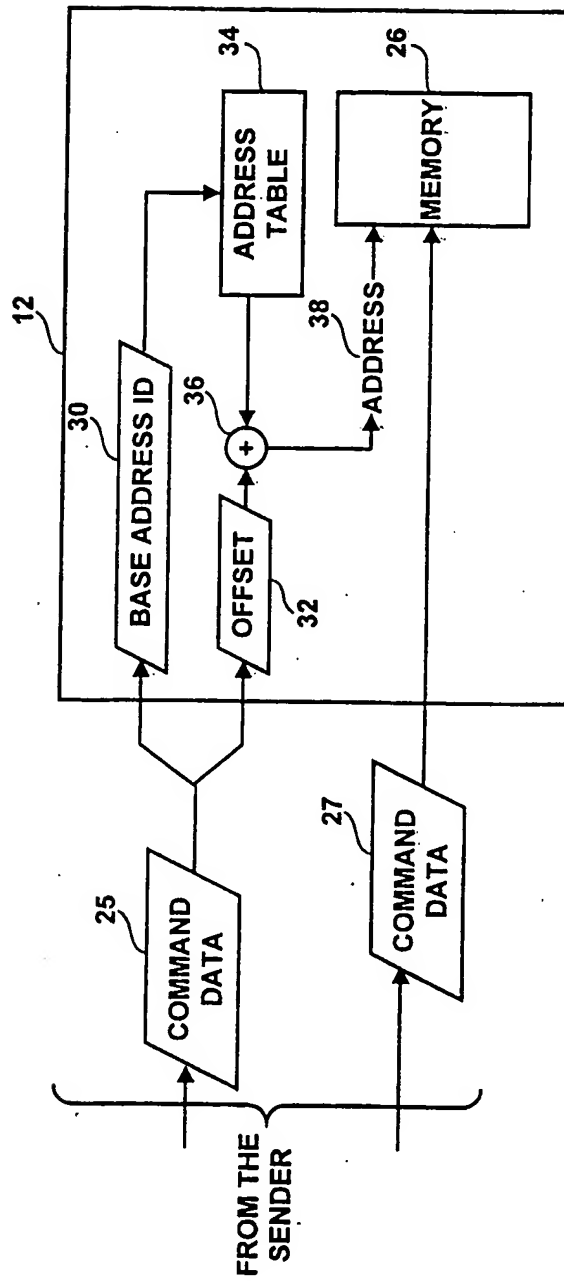


FIG. 3

3/4

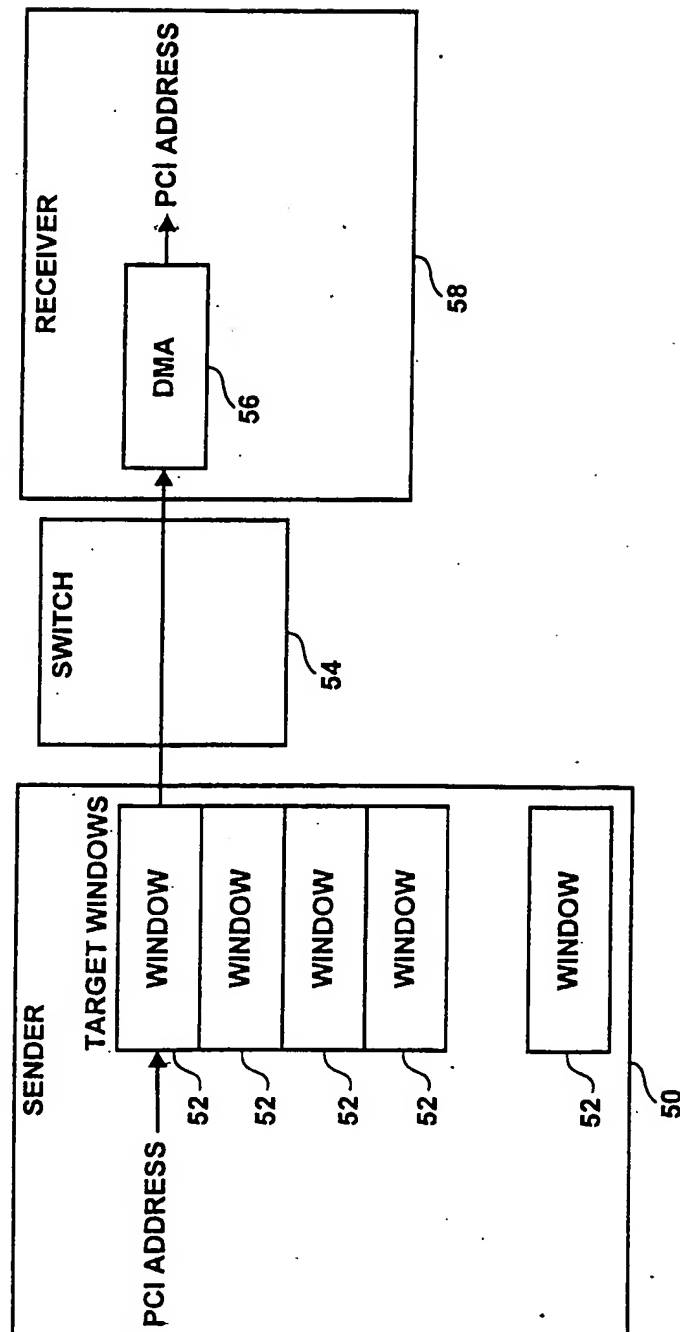
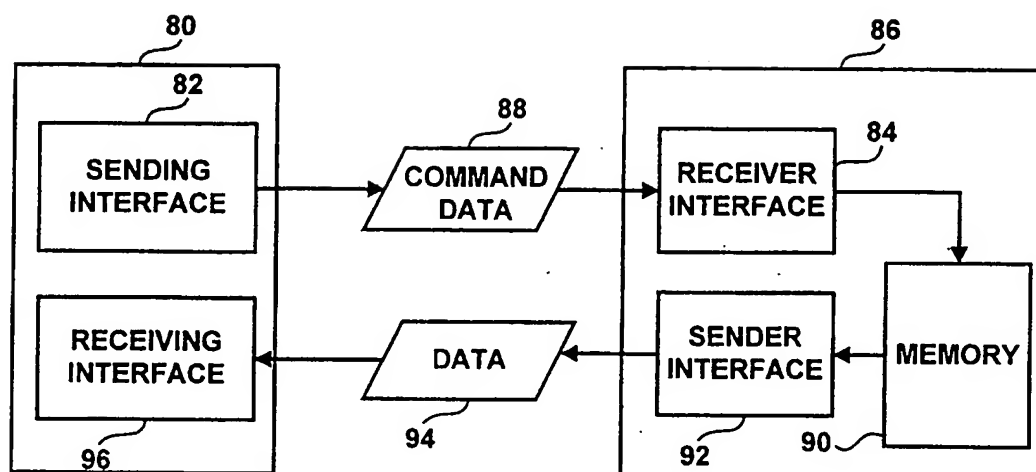
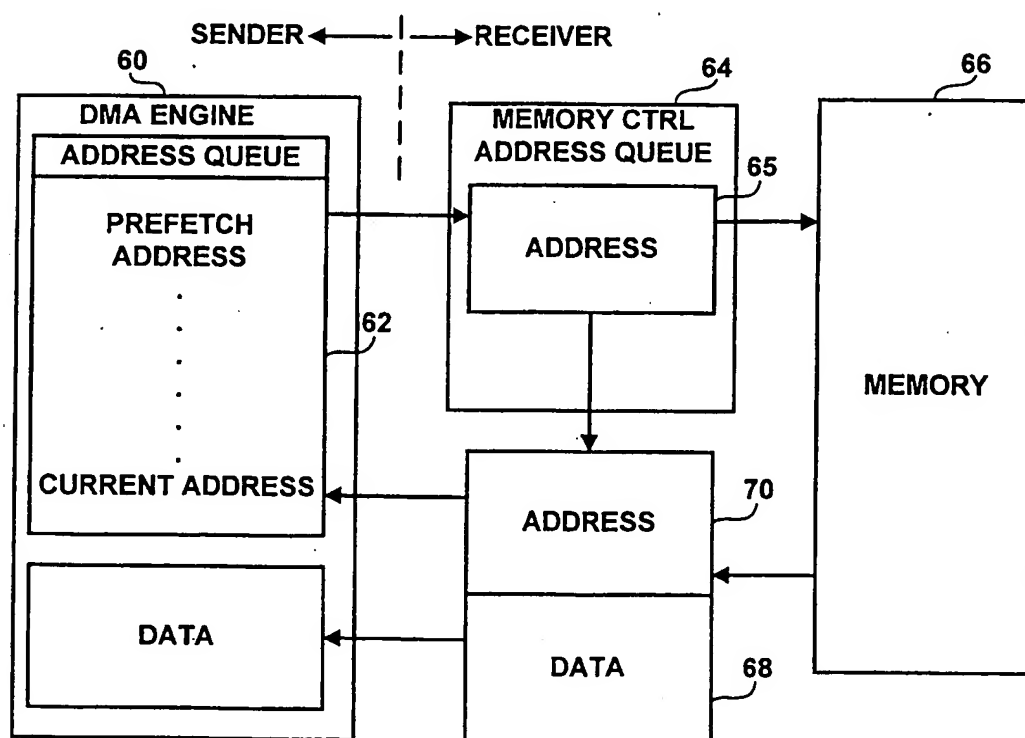


FIG. 4

4/4

**FIG. 5****FIG. 6**

INTERNATIONAL SEARCH REPORT

A. CLASSIFICATION OF SUBJECT MATTER IPC 6 H04N7/24		International Application No. PCT/US 99/07154
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) IPC 6 H04N G06F		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used)		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 658 852 A (ADVANCED MICRO DEVICES INC) 21 June 1995 (1995-06-21)	1-4,6,7,9,10
Y	the whole document	5,8
Y	EP 0 694 849 A (INTEL CORP) 31 January 1996 (1996-01-31)	5,8
A	the whole document	1-4,6,7,9,10
X	US 5 689 660 A (CARLSON RICHARD ET AL) 18 November 1997 (1997-11-18) column 1, line 11 - column 3, line 16 column 5, line 38 - column 13, line 5 abstract; figures 2-6	1-10
-/--		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of box C. <input checked="" type="checkbox"/> Patent family members are listed in annex.		
* Special categories of cited documents : "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. "&" document member of the same patent family		
Date of the actual completion of the international search 25 August 1999		Date of mailing of the international search report 02/09/1999
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer La, V.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/07154

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 627 689 A (IBM) 7 December 1994 (1994-12-07) column 5, line 47 - line 52 column 7, line 37 - column 9, line 44 column 10, line 52 - column 11, line 35 figures 2,4 ---	1-4,6,7, 9,10
A	US 5 604 540 A (HOWE BRADLEY) 18 February 1997 (1997-02-18) column 8, line 35 - column 9, line 67 figure 3A -----	1-10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/07154

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0658852 A	21-06-1995	JP 7210537 A	11-08-1995
		US 5655142 A	05-08-1997
EP 0694849 A	31-01-1996	US 5568620 A	22-10-1996
		AU 7137194 A	24-01-1995
		SE 9504582 A	27-02-1995
		WO 9501603 A	12-01-1995
		US 5615343 A	25-03-1997
		US 5903738 A	11-05-1999
US 5689660 A	18-11-1997	US 5928346 A	27-07-1999
EP 0627689 A	07-12-1994	US 5448703 A	05-09-1995
		BR 9402107 A	13-12-1994
		CA 2124614 A	29-11-1994
		JP 2571673 B	16-01-1997
		JP 7013908 A	17-01-1995
		KR 9708194 B	21-05-1997
US 5604540 A	18-02-1997	US 5596376 A	21-01-1997
		US 5900865 A	04-05-1999